

EXPORTING YOUR DATA FROM A JOHN DEERE 2630 CAB MONITOR

Step 1: Export Data from Your John Deere 2630 Cab Monitor onto a USB

1) Power on the monitor and locate the USB port on the upper right hand of the monitor, then insert the USB

2) The **Data Transfer** screen will automatically appear. Select the **Export Data** button on the screen

3) Select the name of the profile you would like to export by clicking on **Export Profile Name**

4) Select **Begin Transfer** and the monitor will prompt you when export is complete





Step 2: Import Data from USB onto your Computer

Insert your USB drive into your computer's USB port. Select your USB drive, then copy the file you want to export onto your computer. Your file has now been copied from your USB onto your computer.

Step 3: Zip Your Data Files

Select your data files. Right click on the selected files, select **Send To**, then **Compressed (zipped) folder**.

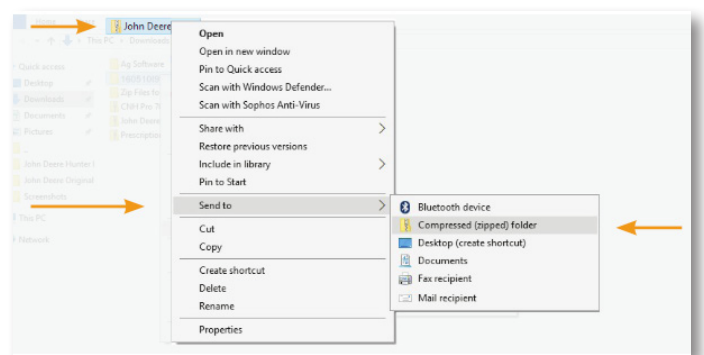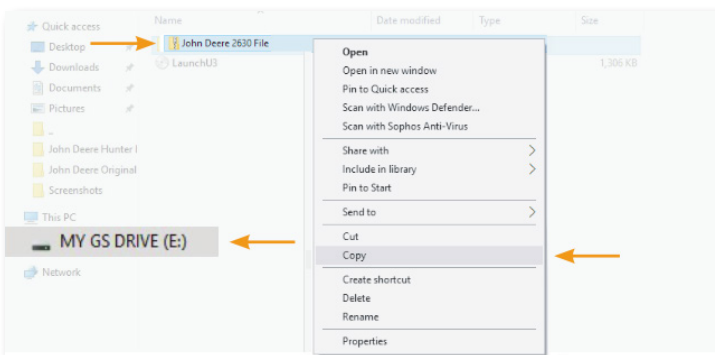

Questions? 800.260.8366 | www.truacre.com | CRS System Support 877.551.0410

Our services provide estimates or recommendations based on models. TruAcres Technology does not guarantee or warranty results. Consult your agronomist, commodities broker or other service professionals before making financial, risk management or farming decisions. Information and recommendations we provide do not modify your rights under insurance policies purchased through our affiliates. The following trademarks are used with permission: Climate FieldView® is a registered trademark of Precision Planting, LLC; GreenStar®, CommandCenter®, SeedStar®, StarFire® and SprayStar® are registered trademarks of Deere & Company Corporation; iPad® is a registered trademark of IP Application Development, LLC; and AgFiniti is a registered trademark of Ag Leader Technology, Inc.; ©2018 TruAcres Technology. All Rights Reserved.