

EXPORTING DATA FROM A JOHN DEERE 2600 MONITOR


Step 1: Export Data from Your John Deere 2600 Cab Monitor to your computer

- Remove the data card from the 2600 monitor (data should already be saved to the card).
- Insert your data card into the appropriate SD card reader slot on your computer.
- Right click on the RCD files and select *Copy*.
- Navigate to the desktop folder, right click and then select *Paste*.



Step 2: Zip Your Files

- Navigate to your desktop
- Right click on the RCD file you just copied from your data card, select Send to, the choose *Compressed (zipped) folder*

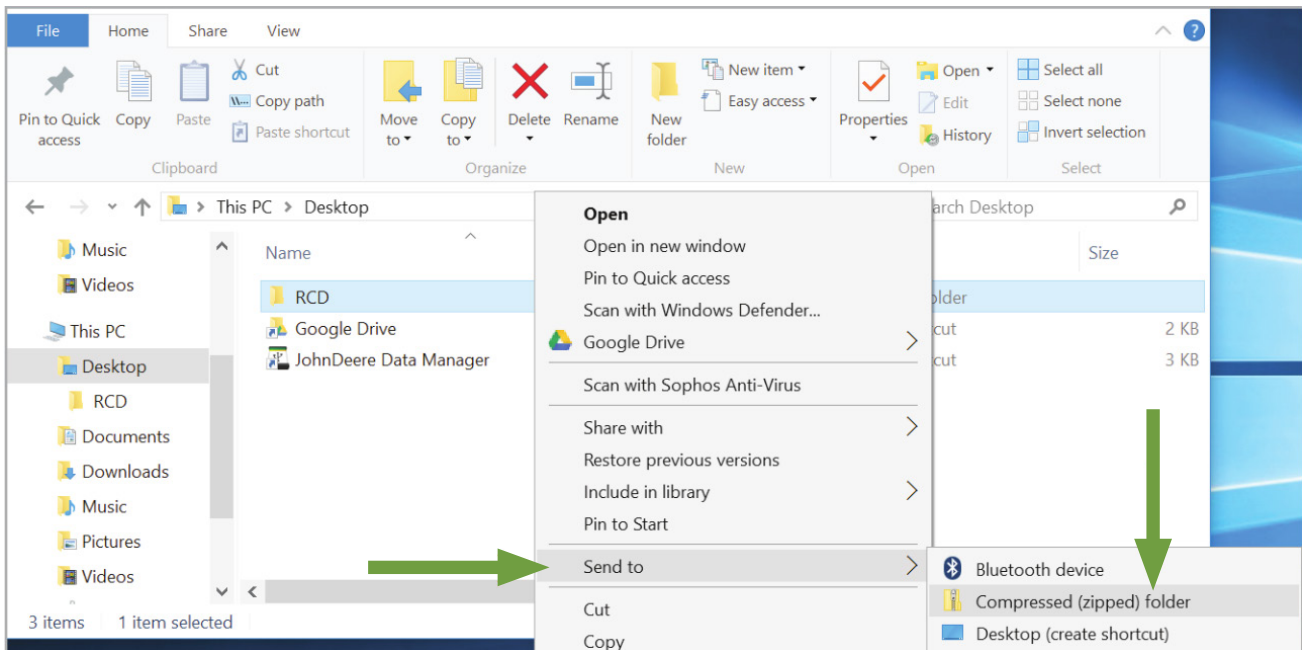

TRUACRES
— TECHNOLOGY —
PRECISION FARMING SOLUTIONS

Questions? 800.260.8366 • www.truacres.com • CRS System Support 877.551.0410

Our services provide estimates or recommendations based on models. TruAcres Technology does not guarantee or warranty results. Consult your agronomist, commodities broker or other service professionals before making financial, risk management or farming decisions. Information and recommendations we provide do not modify your rights under insurance policies purchased through our affiliates. The following trademarks are used with permission: Climate FieldView® is a registered trademark of Precision Planting, LLC; GreenStar®, CommandCenter®, SeedStar®, StarFire® and SprayStar® are registered trademarks of Deere & Company Corporation; iPad® is a registered trademark of IP Application Development, LLC.; and AgFiniti is a registered trademark of Ag Leader Technology, Inc.; ©2020 TruAcres Technology. All Rights Reserved.